

D-LIGHTZ *Tilt*



SL112T
ULG clear glass
Beam 20° 40° 60°
Task | General lighting




SL111T
Prismatic diffuser
Beam 20° 40° 60°
General | Task lighting



SL113T
Opaque diffuser
Beam 90°
Wide angle lighting

D-LIGHTZ Tilt

- + fully adjustable 360° gimbal
- + 26° tilt
- + suitable for indoor and exterior (soffits)
- + wide range of beam angles
- + IP65 front

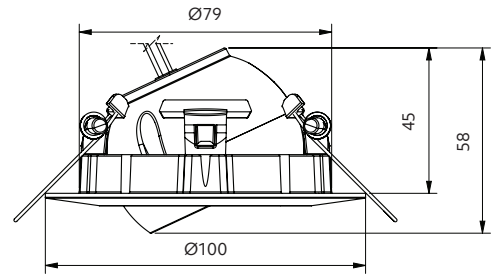

Beam control options

Beam angle



20° 40° 60° 90°
 ULG clear glass Prismatic Opaque

Other options

Trim colour



White Black Silver

Pure colour options

CCT



CRI

Professional series (P) CRI 90 Art series (A) CRI 97

Driver

Phase cut dim (standard)
 0-10V, 1-10V
 DALI

Product information

(example: Prismatic, 40°, 3000K, CRI 90, phase cut driver)

Driver (mA)	Power (W)	Delivered lumens (lm)	Insulation coverable		
			NZ	AU	UK/EU
150	6.8	550	IC-F	IC-4	✓
220	9.2	800	IC-F	IC-4	✓
300	13.2	1000	CA135	Do not cover	✓



Tilt Angle 26° Size 100x48mm Cut-out Ø83-92mm Hole depth >50mm** Front

**Specification is for ceiling material ≤ 13mm with a phase cut driver.

how to specify D-LIGHTZ Tilt

Please confirm model option availability from our website. Not every combination is compatible.

e.g. code = SL111T-40-30-P-W

Model	Beam	CCT	CRI	Trim Colour	Driver - Phase cut*	Market
SL112T = ULG clear glass SL111T = Prismatic SL113T = Opaque	20 = 20° 40 = 40° 60 = 60° 90 = 90°	27 = 2700K 30 = 3000K 40 = 4000K SD = Sunset Dimming	P = 90 A = 97	W = White B = Black S = Silver	D09 = 150mA (6.8W) D12 = 220mA (9.2W) D12 = 300mA (13.2W) *Check online for driver options.	1 = NZ 2 = AU 3 = EU

Please see www.switch-lighting.co.nz for full specifications, lux levels, SDoCs, ies files and installation instructions.



Warranty
7yr Luminaire
5yr Driver

L70 (60,000 h)

