

Installation Instructions – PM171

SL224 / SL234 / SLGL234 Spot-LIGHTZ

Mounting:

SL224 Surface mount

SL234 Spike mount

SLGL234 Spike mount 2

Constant voltage:

11-30VDC: 2700K, 3000K, 4000K, red, amber

20-30VDC: green, blue

Caution:

May not be suitable for areas with high vibration.

All cabling connections required to be fully waterproofed for exterior installation.

DO NOT use 12VAC or 24VAC drivers.

Note:

Reverse polarity protected to 60V.

Smaller cables may be used if operated from 24V power supply units.

Warranty:

Luminaire: 5 years

Warranty will be void if the product is immersed fully in water.

Proof of purchase is required. See website for full warranty conditions.

Please see overleaf for Constant Voltage information

www.switch-lighting.co.nz

Installation:


(by registered electrician only)

2700K, 3000K, 4000K

red and amber

Spot-LIGHTZ

1. Connect the lights in **PARALLEL**.
2. Ensure 12V or 24V DC power supply is adequately rated.
Allow 5.3W per light.
3. Ensure cable is adequately rated.

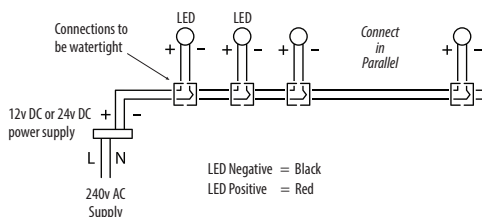

Installation:


(by registered electrician only)

Green and blue

Spot-LIGHTZ

Note: 24 VDC only

1. Connect the lights in **PARALLEL**.
2. Ensure 24V DC power supply is adequately rated.
Allow 5.6W per light.
3. Ensure cable is adequately rated.

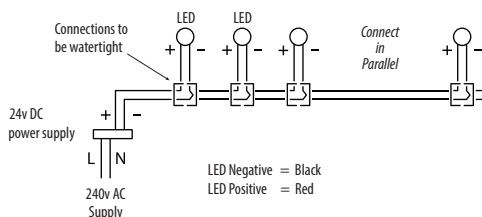

How many constant voltage lights per driver?

Click on the QR code below to check max & min number of lights to connect and for cable sizing information:

