

# SLED

SL50  
SL55  
SL56



LED DOWNLIGHT WITH DIMMABLE & COVERABLE DRIVER



SL50-30-W  
SL50-30-B  
SL50-40-W



SL55-30-W



SL56-30-W



**8.6W** - 840 lm

**8.6W** - 870 lm

**12.8W** - 1250 lm  
(SL55-30-W)

**12.8W** - 1250 lm  
(SL56-30-W)



**COLOUR** - 3000K  
- 4000K  
(SL50-40-W only)



## SIZE

Ø103 x 42mm (SL50)

Ø120 x 42mm (SL55)

Ø150 x 42mm (SL56)



**ANGLE** - 90° beam



**IP44**



**TRIM** - white  
- black (SL50-30-B)



- + 5 YEAR WARRANTY ON LUMINAIRE & DRIVER
- + BURNS BRIGHT FOR UP TO 35,000 HOURS (L70)
- + CLEVER THERMAL DESIGN TO ALLOW INSULATION TO COVER THE LIGHT AND DRIVER
- + 80% ENERGY SAVINGS
- + DIMMING
- + ZERO CLEARANCE NEEDED TO BUILDING AND LOW PROFILE – CAN BE USED ANYWHERE

## LED DOWNLIGHT WITH DIMMABLE & COVERABLE DRIVER

### Specifications

	SL50-30-W / B	SL55-30-W	SL56-30-W
Beam angle	90°	90°	90°
Colour temp	3000K	3000K	3000K
Trim colour	White / Black	White	White
Type	Wide angle downlight	Wide angle downlight	Wide angle downlight
Dimming	Yes	Yes	Yes
Dimensions	103mm x 42mm	120mm x 42mm	150mm x 42mm
Min hole depth	45mm	45mm	45mm
Driver (included)	Yes	Yes	Yes
Driver covered	Yes	Yes	Yes
LED power	7.5W	10.5W	10.5W
System power	8.6W	12.8W	12.8W
Efficacy	98 lm/W	98 lm/W	98 lm/W
PF	0.95	0.95	0.95
CRI	80+ CRI	80+ CRI	80+ CRI
Delivered lumens	840 Lumen	1250 Lumen	1250 Lumen
IP rating	IP44 front face	IP44 front face	IP44 front face
Cutout	87-92mm	98-108mm	122-135mm
Classification	IC-4 & IC-F	IC-4 & IC-F	IC-4 & IC-F
Expected life (T70)	Up to 35,000 hrs	Up to 35,000 hrs	Up to 35,000 hrs
Replaces	Traditional 75W light bulb or better	Traditional 100W light bulb or better	Traditional 100W light bulb or better
HCB & SCB	Omm	Omm	Omm

\*Specifications are given for 3000K colour. Specifications for other colours may differ slightly.

✚ **INSULATION SAFE**  
Insulation safely wraps over.

✚ **NO HEAT LOSS**  
Fully sealed product.  
Prevents air flow and heat loss from living space.

✚ **SCB & HCB = 0**  
Can be used in any room in any position. Can abut timber and building elements.

✚ **DIMMABLE DRIVER**  
Excellent stable dimming.


✚ **LOW PROFILE**

✚ **WARRANTY**  
5 years downlight, 5 years driver.

### SL50-30-W / SL50-30-B

#### Light levels

90° - 300mA

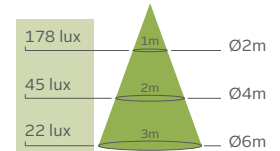


#### Dimensions



### SL50-40-W

#### Light levels

90° - 300mA

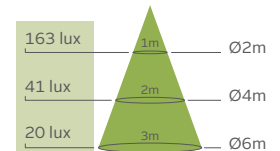


#### Dimensions




### SL55-30-W

#### Light levels

90° - 300mA

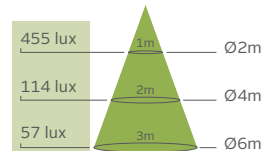


#### Dimensions

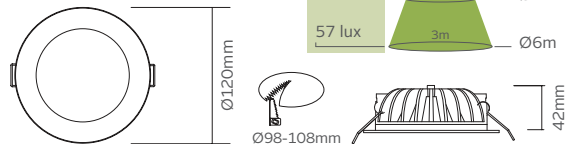


### SL56-30-W

#### Light levels


90° - 300mA



#### Dimensions

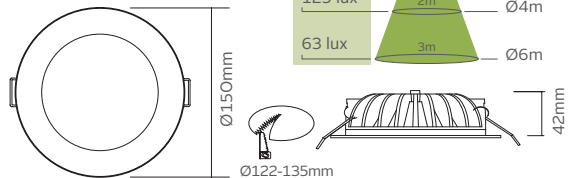

### Insulation & drivers

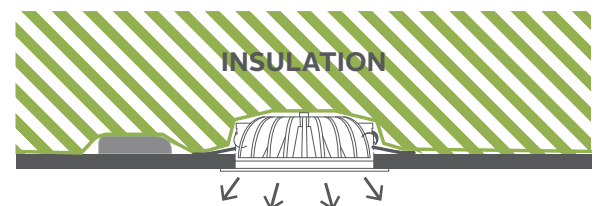

Driver and luminaire can be covered with insulation